


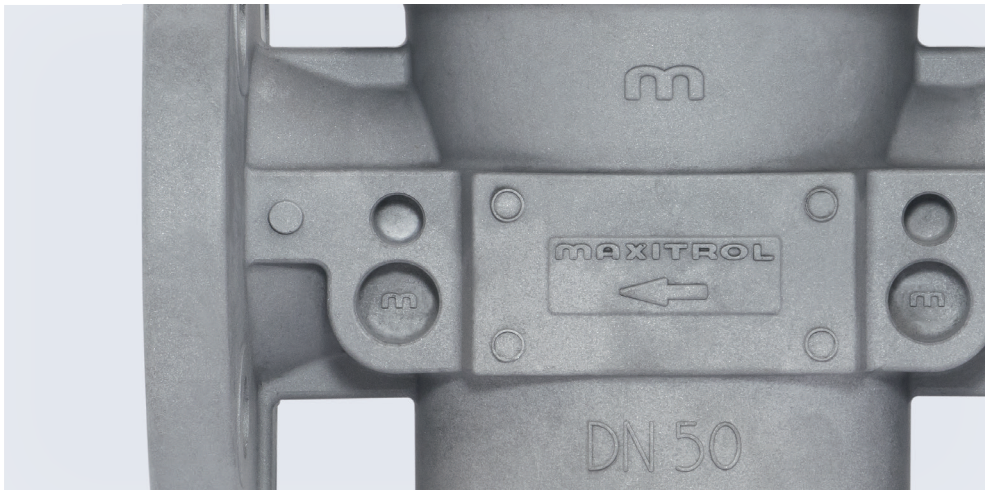

GAS PRESSURE REGULATOR AND FILTER CATALOG

11th Edition

MAXITROL®

www.maxitrol.com

⚠ WARNING

Service and installation must be performed by a trained/experienced service technician.

All products used with combustible gas **must** be installed and used **strictly** in accordance with the instructions of the Original Equipment Manufacturer (OEM) and with all applicable government codes and regulations, e.g. plumbing, mechanical, and electrical codes and practices. All Maxitrol products should be installed and operated in accordance with Maxitrol Safety Warning Instructions.

Maxitrol is NOT responsible for any errors or omissions in reliance by anyone of any information set forth in this catalog without additional reference to local requirements and applicable ordinances or codes.

The products in this catalogue comply with EU legislation. The technical specifications refer to the CE certification. Additional international approvals and certifications, e.g., CSA and UL, are available upon request.



RV SERIES

STRAIGHT-THRU-FLOW DESIGN

Maxitrol's original Straight-Thru-Flow (STF) design regulators are non-lockup type regulators for high capacities at low inlet pressures. The difference between STF design and other type regulators is the conical valve. The cone principal permits gas to flow straight through the regulator without changing directions. Frictional flow resistance is reduced, resulting in greater capacity. An improved flow pattern provides accurate, sensitive regulation at extremely low pressure differentials. Typical applications include residential, commercial, and industrial gas-fired appliances and equipment used on low or medium pressure gas supplies.

Specifications


- **Pipe Sizes:**
 - RV52, RV53, RV61, RV81, RV91, RV111: Rp ½ to Rp 3 threaded connections according to ISO 7-1/EN10226-1
- **Housing Material:**
 - RV52, RV53, RV61, RV81, RV91, RV111: Aluminum
- **Internal Components Material:** Steel, aluminum, elastomer
- **Mounting:** RV52, RV53, RV61 are suitable for multi-positional mounting. Other than upright position will result in a slight difference in outlet pressure. If ball check vent limiting device is installed, mount in an upright position only. RV81, RV91, RV111 upright position only. Install with gas flowing as indicated by the arrow on bottom casting.
- **Construction and Design/Certifications:** According to the Gas Appliances Regulation (EU) 2016/426 and EN 88-1
- **Fuel Gases:** Suitable for gases of EN 437
- **Maximum Inlet Pressure:**
 - RV52: 10 kPa
 - RV53, RV61, RV81, RV91, RV111: 20 kPa
- **Ambient Temperature Range:** -15 °C to 80 °C
- **Capacities:** See flow chart, page 19
- **Model Designations:** Models having a suffix letter, or a combination of suffix letters, listed below indicates the design modifications described.
(M) B.S.P. - PL parallel thread "Rp" - conforms to ISO 7-1/EN10226-1, where pressure tight joints are made on the threads.

Dimensions


Model	Pipe Sizes	Swing Radius	Dimensions			
			A	B	C	D
RV52...	Rp ½, Rp ¾	91 mm	124 mm	32 mm	83 mm	81 mm
RV53...	Rp ¾, Rp 1	99 mm	132 mm	33 mm	99 mm	95 mm
RV61...	Rp 1, Rp 1 ¼	122 mm	164 mm	41 mm	138 mm	111 mm
RV81...	Rp 1 ¼, Rp 1 ½	162 mm	213 mm	51 mm	178 mm	153 mm
RV91...	Rp 2	216 mm	275 mm	60 mm	232 mm	165 mm
	Rp 2 ½	212 mm	267 mm	62 mm	232 mm	181 mm
RV111...	Rp 2 ½, Rp 3	284 mm	373 mm	89 mm	324 mm	229 mm

NOTE: Dimensions are maximums and to be used only as an aid in designing clearance for the regulator. Actual production dimensions may vary somewhat from those shown.

NOTE: NPT thread on request

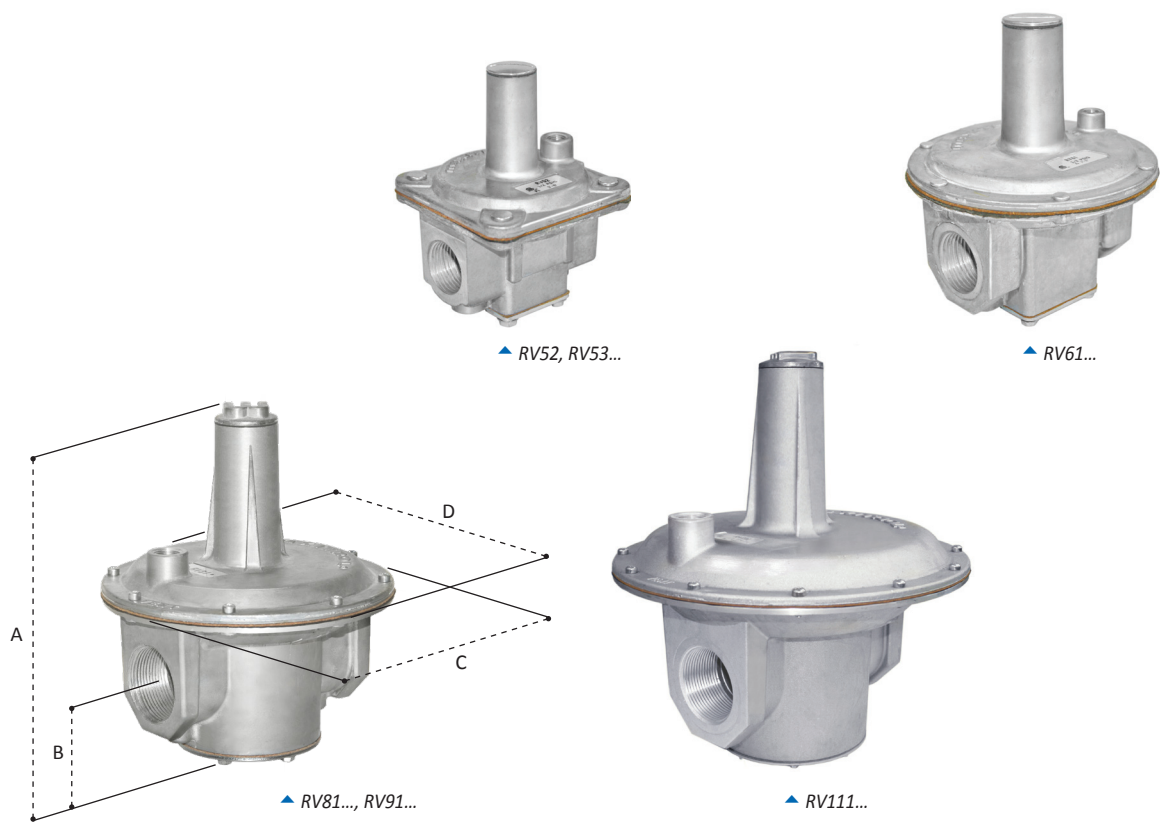

Straight-Thru-Flow Design

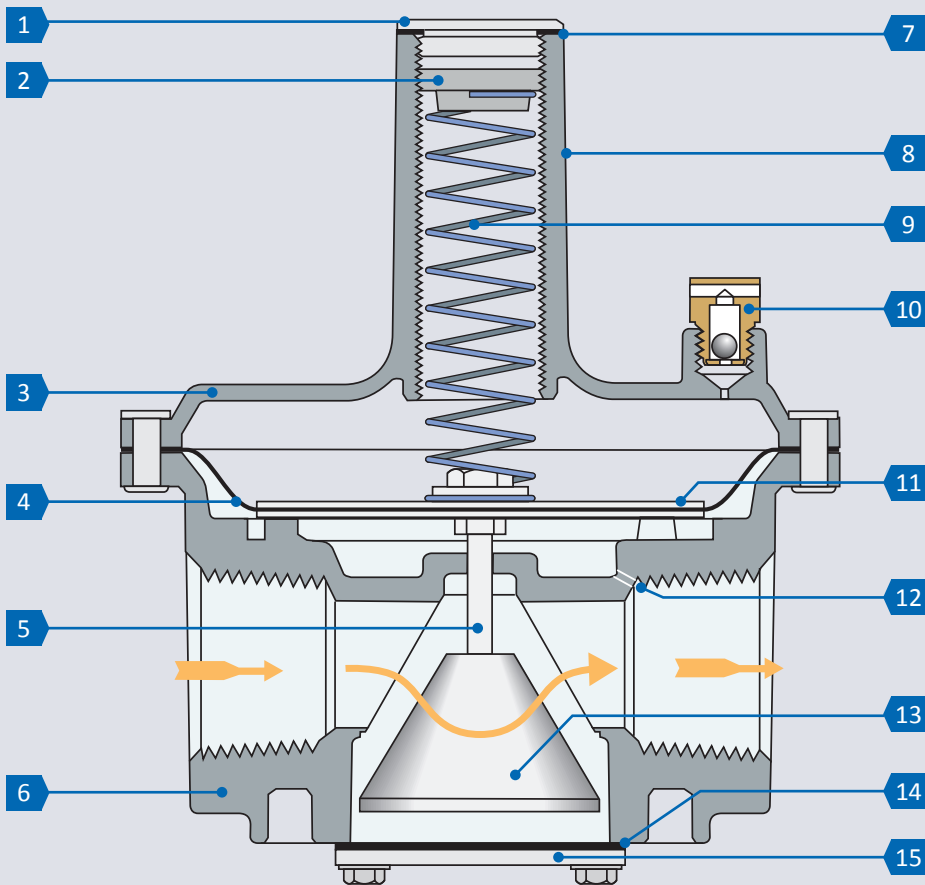

NOTE: Diagrams are graphical representations only and may differ from actual product.

- 1 Welch Plug/Seal Cap
- 2 Vibration Resistant Adjusting Screw
- 3 Top Housing
- 4 Diaphragm
- 5 Stem
- 6 Bottom Housing
- 7 Seal Cap Gasket
- 8 Stack
- 9 Spring
- 10 Vent Limiting Device
- 11 Diaphragm Plates
- 12 Sensing Hole
- 13 Valve
- 14 Bottom Plate Gasket
- 15 Bottom Plate

SPRING SELECTION

Model	Spring Replacement Number	Spring Code											
		A	B	C	D	E	F	G	H	K	L	M	N
		Outlet Pressure Range (1 kPa = 10 mbar)											
		0.25 – 0.90	0.50 – 1.25	0.50 – 1.50	0.70 – 1.30	0.75 – 2.00	1.00 – 2.00	1.00 – 3.00	1.25 – 3.00	2.50 – 5.50	3.75 – 7.50	5.00 – 10.50	7.00 – 14.00
		Color											
		brown	(plated)	green	(plated)	pink	orange	violet	blue	red	yellow	black	label
RV12...	KIT ...-R1210T	X			X		X	X					
RV20...	KIT ...-R2010	X			X		X	X					
RV47...	KIT ...-R4710	X			X		X	X					
RV48...	KIT ...-R4810	X			X		X		X				
RV52...	KIT ...-R5210	X	X			X		X		X			
RV53...	KIT ...-R5310	X	X			X		X		X	X		
RV61...	KIT ...-R6110	X	X			X			X	X	X		
RV81...	KIT ...-R8110	X	X			X		X		X	X	X	
RV91...	KIT ...-R9110	X	X			X		X		X	X	X	
RV111...	KIT ...-R11110	X	X			X		X		X	X	X	
325-3...	KIT ...-R325C10			X				X		X	X		X
325-5...	KIT ...-R325E10			X				X		X	X		X
325-7...	KIT ...-R8110	X	X			X		X		X	X	X	
R400S...	KIT ...-R400B10	X	X			X		X		X			
R500S...	KIT ...-R5210	X	X			X		X		X			
R600S...	KIT ...-R5310	X	X			X		X		X	X		
R700S...	KIT ...-R6110	X	X			X			X	X	X		
210D...	KIT ...-R8110	X	X			X		X		X	X	X	
210E...	KIT ...-R9110	X	X			X		X		X	X	X	
210G...	KIT ...-R11110	X	X			X		X		X	X	X	
210J...	KIT ...-R13110		X			X		X		X	X	X	

NOTE: No spring replacement required for zero pressure regulator models.

ACCESSORIES

The following items are not sold separately. They are delivered with the gas pressure regulators.

Vent Limiting Device: $\checkmark$ Limitier[®]

Maxitrol vent limiting devices eliminate the need to run vent piping to the outside. Vent limiting devices are designed for use indoors and in spaces where limiting the amount of gas escapement due to diaphragm failure is critical. Vent limiting devices should not be used outdoors if they are exposed to the environment.

Optional automatic vent limiting device – ball check permits unobstructed inhalation for fast regulator diaphragm response on opening cycle, but limits gas escapement to be within EN 88 requirements should a diaphragm rupture:

- **12A04:** Use on RV52, RV53, RV61, R400S, R500S, and R600S regulators
- **12A09:** Use on 325-3 regulators
- **12A39:** Use on RV81, RV91, RV111, 325-5, 325-7, R700S, and 210 series regulators

Pressure Tap

Pressure tap installed as an optional part of the control. The hose fitting is provided with a captive screw plug. This eliminates the need for an additional fitting with a measuring connection.

- PF10: For RVLM (Poppets) and filters (others upon request).

Dust Cap

Use on vent opening to prevent blockage of breather hole from dust or other foreign particles. Standard on all “L” models with 1/8 threaded vent.

- **13A09:** For Rp 1/8 vent. Press-in plastic cap

Tamper Proof Seals

Permanent pressure sensitive backed paper. Attempted removal of these seals will destroy the face stock, leaving adhesive residue on surface beneath. Therefore, tampering can be easily detected. Available for all threaded models. Outlet pressure printed on seal.

- **101310:** For RV12, RV20L, RV47, RV48, RV52, RV53, RV61, R400S(Z), RV500S(Z), R600S(Z), R700(Z), 325-3, and 325-5
- **101311:** For RV81, RV91, RV111, 210D, 210E, 210G, 325-7



12A04/12A09 12A39

NOTE: When using the vent limiting device, the regulator must be mounted in a horizontal upright position.

NOTE: If no vent limiting device is used, regulator vent must be piped in accordance with government and local codes and regulations.



PF10



13A09



101310

SIZING A REGULATOR

System Requirements

When sizing a regulator the following must be known:


- Fuel Gases
- Available Inlet Pressure
- Desired Outlet Pressure
- Zero Pressure Regulator Application (indicated by model number ending in "Z")
- Will the regulator control main burner and pilot load OR main burner only?
- Required minimum and maximum flow rate in m³/h or kW
- Pipe Size

In most cases, the manifold pipe size has already been selected on the basis of good engineering practice, and the regulator pipe size should conform to this size.

The capacity of any regulator is not an absolute value but will vary with the application depending on the prevailing differential pressure.

HOW TO DETERMINE THE SUITABLE REGULATOR FROM THE FLOW CHART

Draw a horizontal line with the known differential pressure (inlet pressure minus outlet pressure). Next draw a vertical line with the required flow rate (take care to use the axis with the correct fuel gas). The regulator where both lines cross each other within the range of regulation is the suitable regulator.

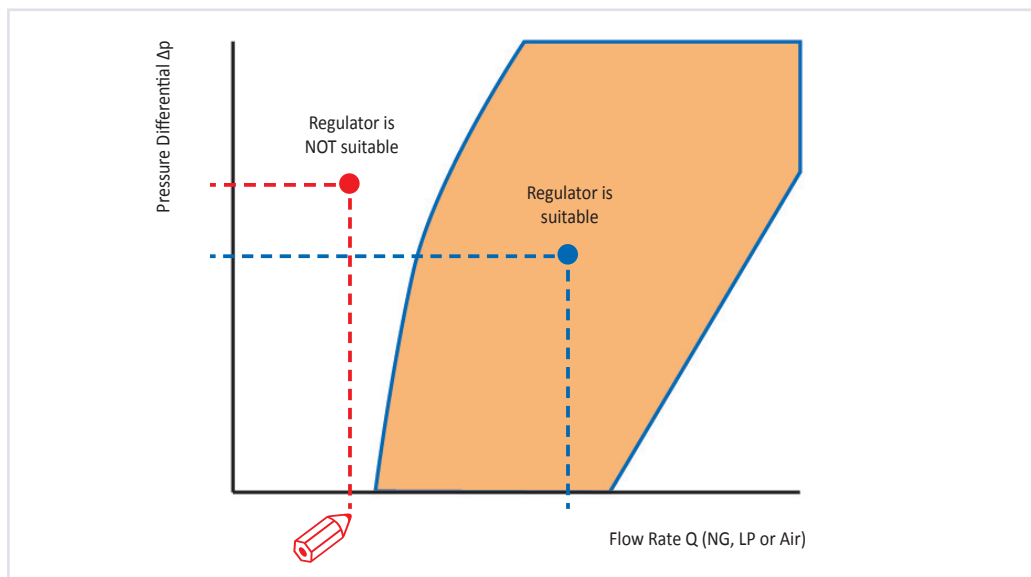

NOTE: Please contact Maxitrol directly for more information on sizing a regulator.

NOTE: Service and installation must be performed by a trained/experienced service technician.

LEGEND FOR FLOW CHARTS

Δp = Pressure Differential in kPa

Q = Flow Rate in m³/h

dv = Volumetric Rate of Flow

f = Friction Factor

ρ = Density

Pressure Units: 1 kPa = 10 mbar = 10 hPa

Air: $dv = 1.00$ $f = 1.00$

Natural Gas (NG): $dv = 0.64$ $f = 1.24$


Liquid petroleum gas (LPG): $dv = 1.56$ $f = 0.80$

$$dv = \frac{\rho_{\text{gas}}}{\rho_{\text{air}}}$$

$$f = \sqrt{\frac{\rho_{\text{air}}}{\rho_{\text{gas}}}}$$

$$\dot{V}_{\text{gas}} = f \cdot \dot{V}_{\text{air}}$$

RV Series – Straight-Thru-Flow Design

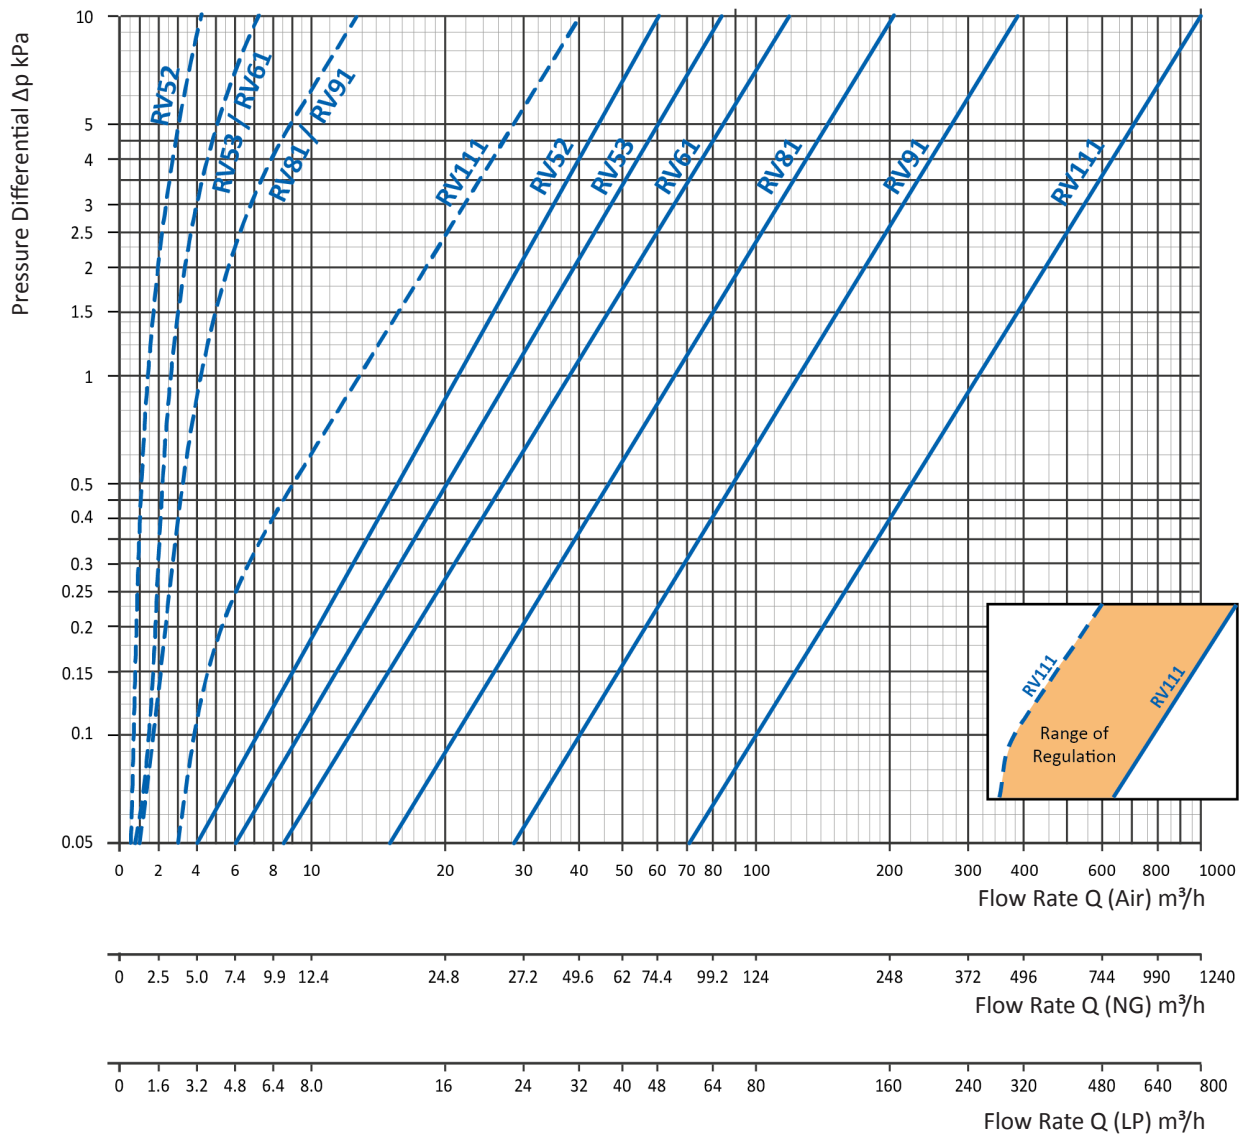

NOTE: The given flow rates are approximate values. Actual flow rates may vary somewhat from those shown.



© 2022 Maxitrol GmbH & Co. KG, All Rights Reserved.

Maxitrol Company

23555 Telegraph Road
Southfield, MI 48033
USA

T: (+1) 248 356-1400
infoNA@maxitrol.com

Maxitrol GmbH & Co. KG

Valleys Innovation Centre
Navigation Park
Abercynon CF45 4SN
United Kingdom

T: (+44) 1443 742-755
M: (+44) 7866 492-261
infoEU@maxitrol.com

Maxitrol GmbH & Co. KG

Warnstedter Str. 3
06502 Thale
Germany

T: (+49) 3947 400-0
infoEU@maxitrol.com

Maxitrol GmbH & Co. KG

Industriestr. 1
48308 Senden
Germany

T: (+49) 2597 9632-0
senden@maxitrol.com